


โพลีเอสเตอร์สลิง แบบแบน ห่วง 2 ข้าง

- ☺ ทำจากเส้นใยโพลีเอสเตอร์ (PES) 100% ตามมาตรฐาน DIN V 61360
- ☺ รับน้ำหนักได้ 100% ในสภาพการใช้งานที่เปียกชื้น หรือที่อุณหภูมิสูงถึง 100°C [200°F]
- ☺ การยืดตัว (Elongation) < 4% ที่น้ำหนักใช้งานสูงสุด (Working load limit)
- ☺ อัตราค่าความปลอดภัย (Safety factor) > 6 เท่า



หน้ากว้าง นิ้ว	1"	2"	3"	4"	5"	6"	8"	10"
Width	25 mm.	50 mm.	75 mm.	100 mm.	125 mm.	150 mm.	200 mm.	250 mm.
Eye length (mm)	350	400	450	500	550	600	700	800
Color	Violet	Green	Yellow	Gray	Red	Brown	Blue	Orange
Capacity	1 ton	2 ton	3 ton	4 ton	5 ton	6 ton	8 ton	10 ton
Length								
1 m.			--	--	--	--	--	--
2 m.								
3 m.								
4 m.								--
5 m.						--	--	--
6 m.								
8 m.								
10 m.								

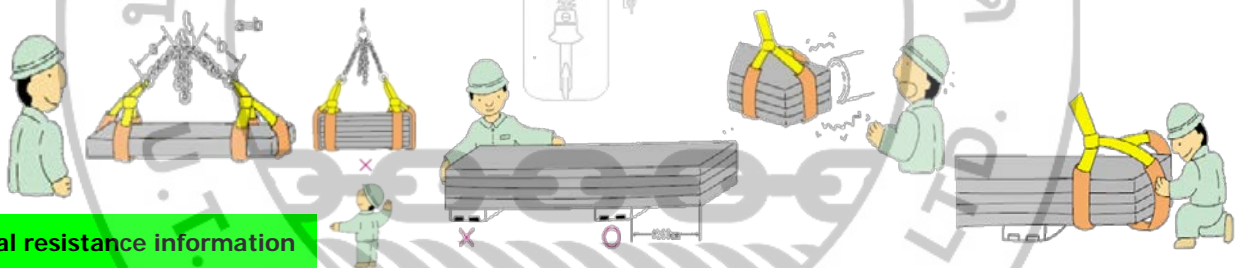

Chemical resistance information

Material	Acids	Alkalis	Ethers	Aldehydes	Alcohols	Oils	organic solvents	water & seawater	Higher chemical concentrations and/or higher temperatures will lower the
Polyester	ok*	NO	NO	NO	OK	OK	OK	OK	
Polyamide	NO	OK	OK	OK	OK	OK	OK	OK	

* disintegrated by concentrated sulfuric acid

IMPORTANT Do not exceed working load	สลิง 1 เส้น WLL with 1 webbing sling					สลิง 2 เส้น WLL with 2 webbing slings			
	Straight lift	Choke hitch	Basket - inclination angle <i>b</i>			Straight - angle <i>b</i>		Choke - angle <i>b</i>	
			0° - 7°	upto 45°	45°-60°	upto 45°	45°-60°	upto 45°	45°-60°
Inclination factor	1	0.8	2	1.4	1	1.4	1.12	1	0.8
25 mm. Violet	1000	800	2000	1400	1000	1400	1120	1000	800
50 mm. Green	2000	1600	4000	2800	2000	2800	2240	2000	1600
75 mm. Yellow	3000	2400	6000	4200	3000	4200	3360	3000	2400
100 mm. Gray	4000	3200	8000	5600	4000	5600	4480	4000	3200
125 mm. Red	5000	4000	10000	7000	5000	7000	5600	5000	4000
150 mm. Brown	6000	4800	12000	8400	6000	8400	6720	6000	4800
200 mm. Blue	8000	6400	16000	11200	8000	11200	8960	8000	6400
250 mm. Orange	10000	8000	20000	14000	10000	14000	11200	10000	8000